




RUGGED DOCKING STATION FOR ZEBRA ET4X 8" & 10" TABLETS

DS-ZEB-300 SERIES

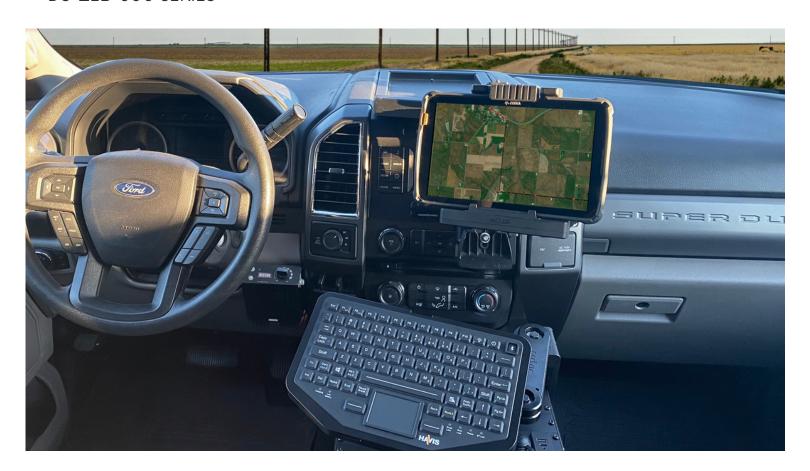

ENABLING TECHNOLOGY IN WORK TRUCK APPLICATIONS

- Height-adjustable design compatible with both 8" & 10" devices
- Standard & Advanced I/O options
- Optional power supply with internal non-isolated and isolated versions
- LED Power Indicator
- One-handed docking & undocking
- Spring-loaded, floating connector head
- Provides access to critical buttons, ports & barcode scanner when docked
- Compact & lightweight design
- Compatible with attachable hand & shoulder straps
- Intelligent cable management system
- Integrated VESA 75 mounting pattern





RUGGED DOCKING STATION FOR ZEBRA ET4X 8" & 10" TABLETS

DS-ZEB-300 SERIES

ET54X TABLET SOLUTION

- Height-adjustable design compatible with both 8" & 10" devices
- Standard & Advanced port replication (optional)
- Isolated & non-isolated internal power supply (optional)
- LED power indicator
- Spring-loaded, floating connector head



PART NUMBER	ETHERNET	USB 2.0	POWERED SERIAL	POWER INPUT	INT POWER
DS-ZEB-301		1 REAR		9-36V	NON-ISO
DS-ZEB-302-ISO		1 REAR		18-75V	ISO
DS-ZEB-303					
DS-ZEB-304	1	2 REAR	1 @ 5V	9-36V	NON-ISO
DS-ZEB-305-ISO	1	2 REAR	1 @ 5V	18-75V	ISO

SPECIFICATIONS:

8" Configuration

Height: 7.2-in (18.3 cm)
Width: 8.6-in (21.9 cm)
Depth: 2.9-in (7.4 cm)
Weight: 1.86 lbs. (0.85 kg)
Mounting: Integrated VESA 75

mounting pattern

10" Configuration Height: 8.3-in (21.1 cm) Width: 8.6-in (21.9 cm) Depth: 2.9-in (7.4 cm) Weight: 1.86 lbs. (0.85 kg) Mounting: Integrated VESA 75

mounting pattern

CERTIFICATIONS & TESTING:

CE Certified, UKCA and RoHS Compliant, UL Listed (Pending)

Vibration Testing: MIL-STD 810H 514.5 Shock Testing: MIL-STD 810H 516.8

Impact Test: Crash Simulation per SAE J1455 30mph

Cycle Test: Latch Tested 30,000 cycles

Environmental Testing: Hot/Cold Operation & Storage

