
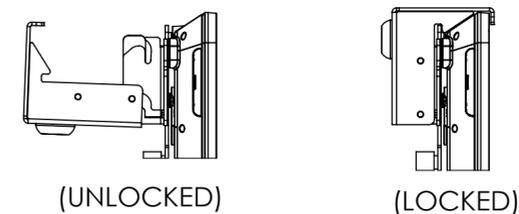
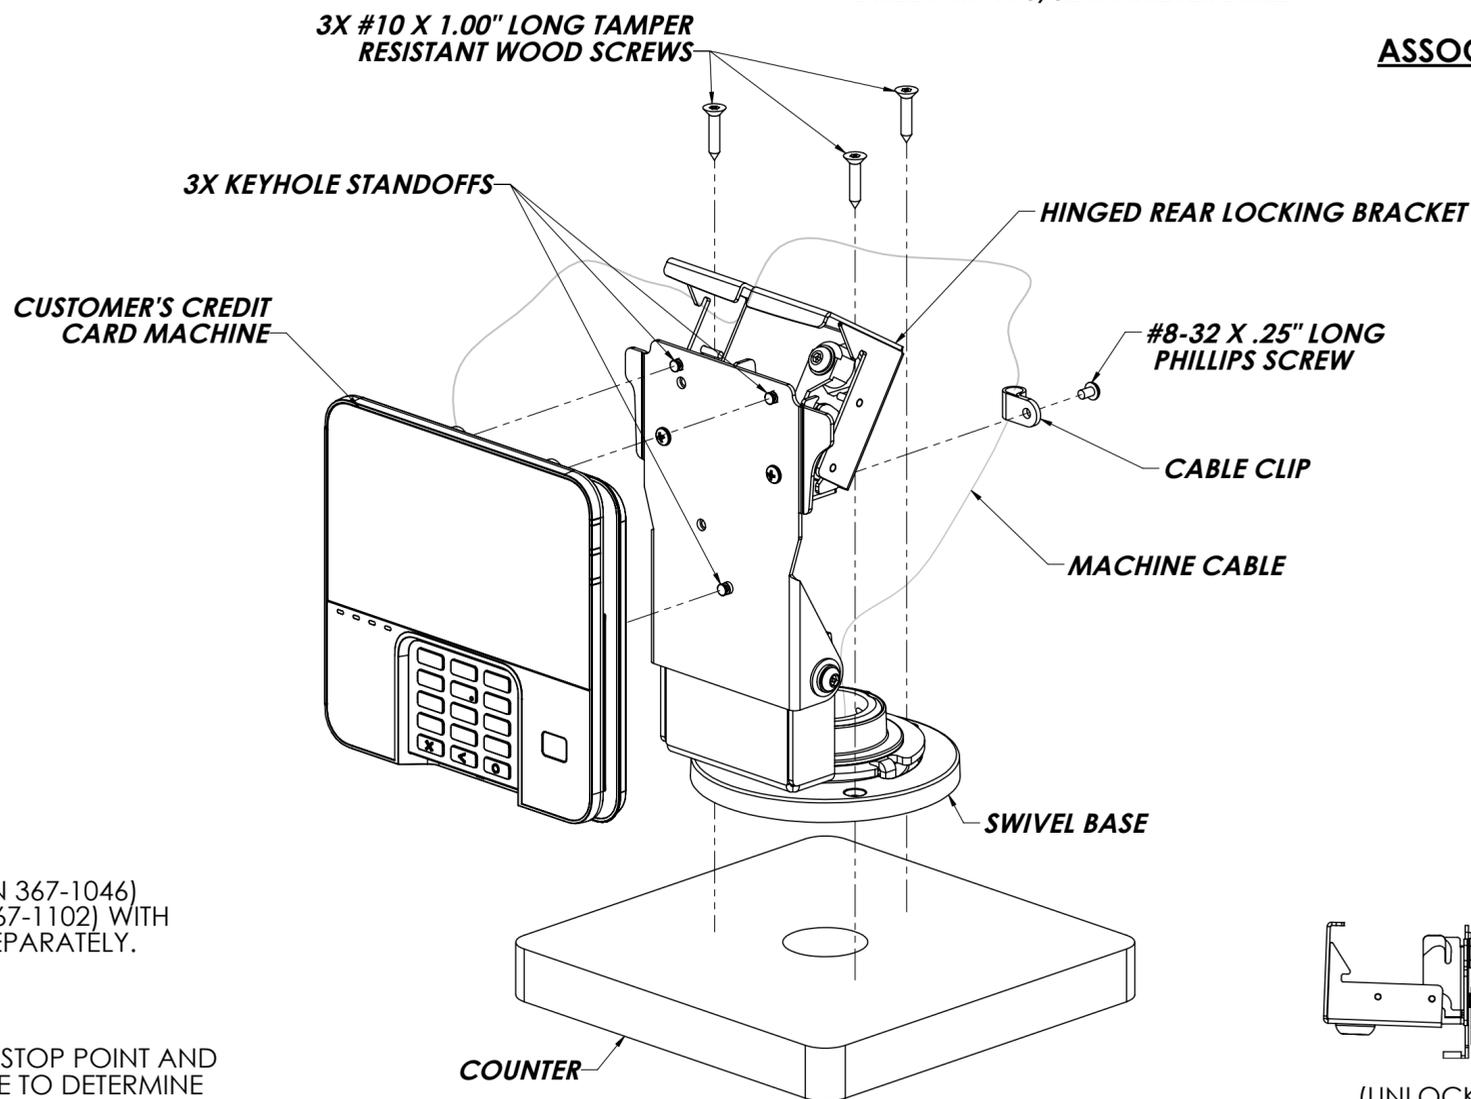
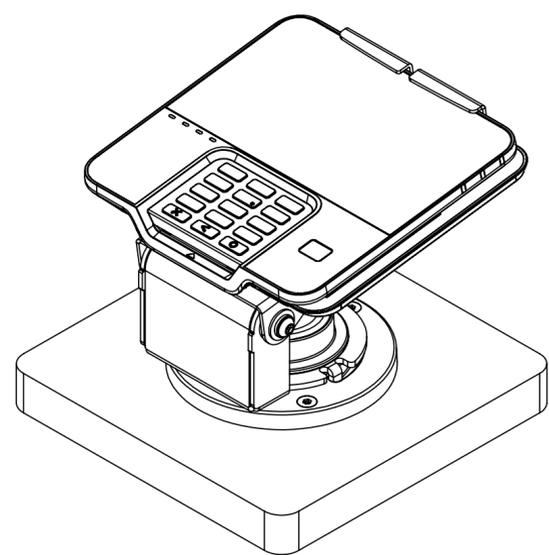
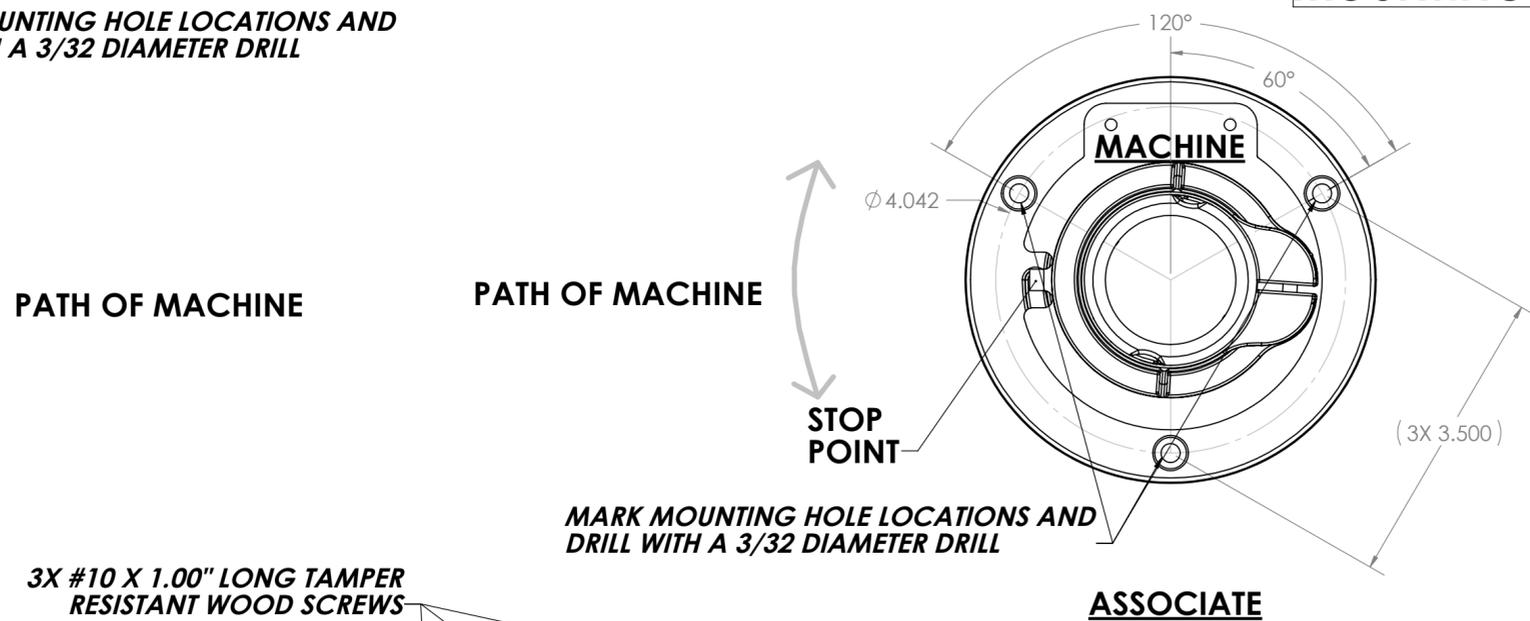


MOUNTING OPTION #1

CUSTOMER MOUNTING OPTION #2

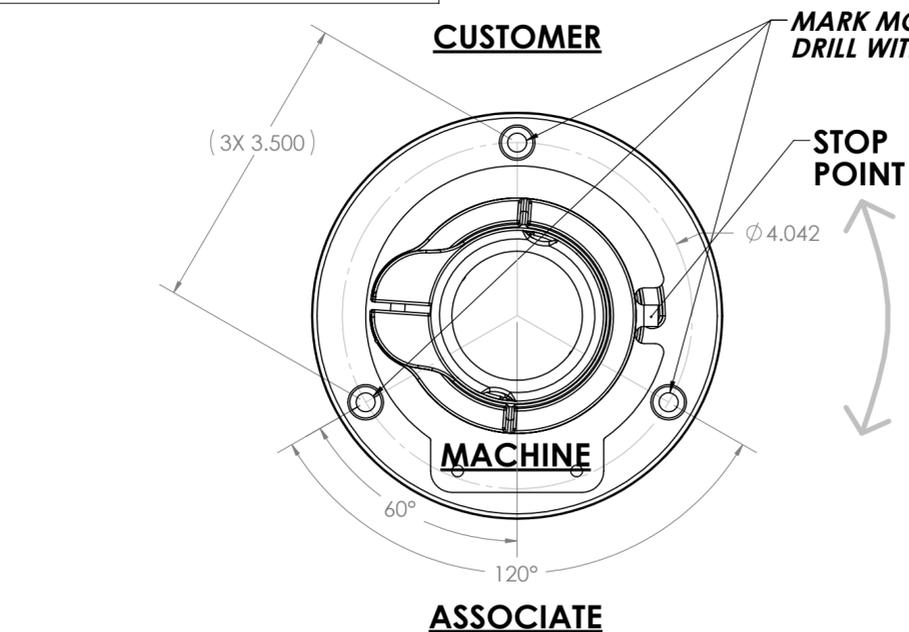

DETAIL B

TOOLS LIST:

1. 5/32 TAMPER RESISTANT HEX WRENCH (ENS P/N 367-1046) OR 5/32 TAMPER RESISTANT HEX BIT (ENS P/N 367-1102) WITH SOCKET DRIVER. ENS PARTS EACH ORDERED SEPARATELY.
2. #2 PHILLIPS SCREW DRIVER

ASSEMBLY STEPS:

1. ROTATE THE **SWIVEL BASE** LEFT OR RIGHT TO THE STOP POINT AND THEN COMPARE IT TO THE ILLUSTRATIONS ABOVE TO DETERMINE WHICH WAY YOU WANT IT TO ROTATE.
2. ASSEMBLE THE **SWIVEL BASE** TO THE **COUNTER** BY USING THE **3X #10 X 1.00" LONG TAMPER RESISTANT WOOD SCREWS** AS SHOWN **MAKING SURE IT IS IN THE CORRECT ORIENTATION BEFORE YOU SCREW IT TO THE COUNTER.**
3. ASSEMBLE THE **CUSTOMER'S CREDIT CARD MACHINE** TO THE **SWIVEL BASE** BY SLIDING IT ONTO THE **3X KEYHOLE STANDOFFS** AS SHOWN. THIS ENSURES THE PROPER FUNCTION OF THE **HINGED REAR LOCKING BRACKET.**
4. MOVE **HINGED REAR LOCKING BRACKET** INTO PLACE AND LOCK AS SHOWN IN **DETAIL B.**
5. INSTALL THE **CABLE CLIP** AS SHOWN USING THE **#8-32 X .25" LONG PHILLIPS SCREW** AS SHOWN.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS IS PROHIBITED.

DIMS. AND TOLERANCES PER ASME Y14.5 - 1994 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		DRAWN W. CLAIRE		11/02/22	WJC	WJC
FRACTIONAL ± 1/32		DATE 11/2/2022		DATE	BY	CHK'D
2 PLC. DEC. ± .03		CHECKED				
3 PLC. DEC. ± .010		DATE				
ANGULAR ± 0°30'		DO NOT SCALE DRAWING				
FINISH -		MATERIAL -		TITLE CUSTOMER INSTRUCTIONS, LOW CONTOUR 8°-90°, WITH REAR LOCKING PLATE, CENTER HOLE SWIVEL STAND, ANTI SKIMMING FEATURE, EMV CARD CLEARANCE, VERIFONE M424		
		SIZE C		DWG. NO. 367-6076		REV. A
						SHEET 1 OF 1