
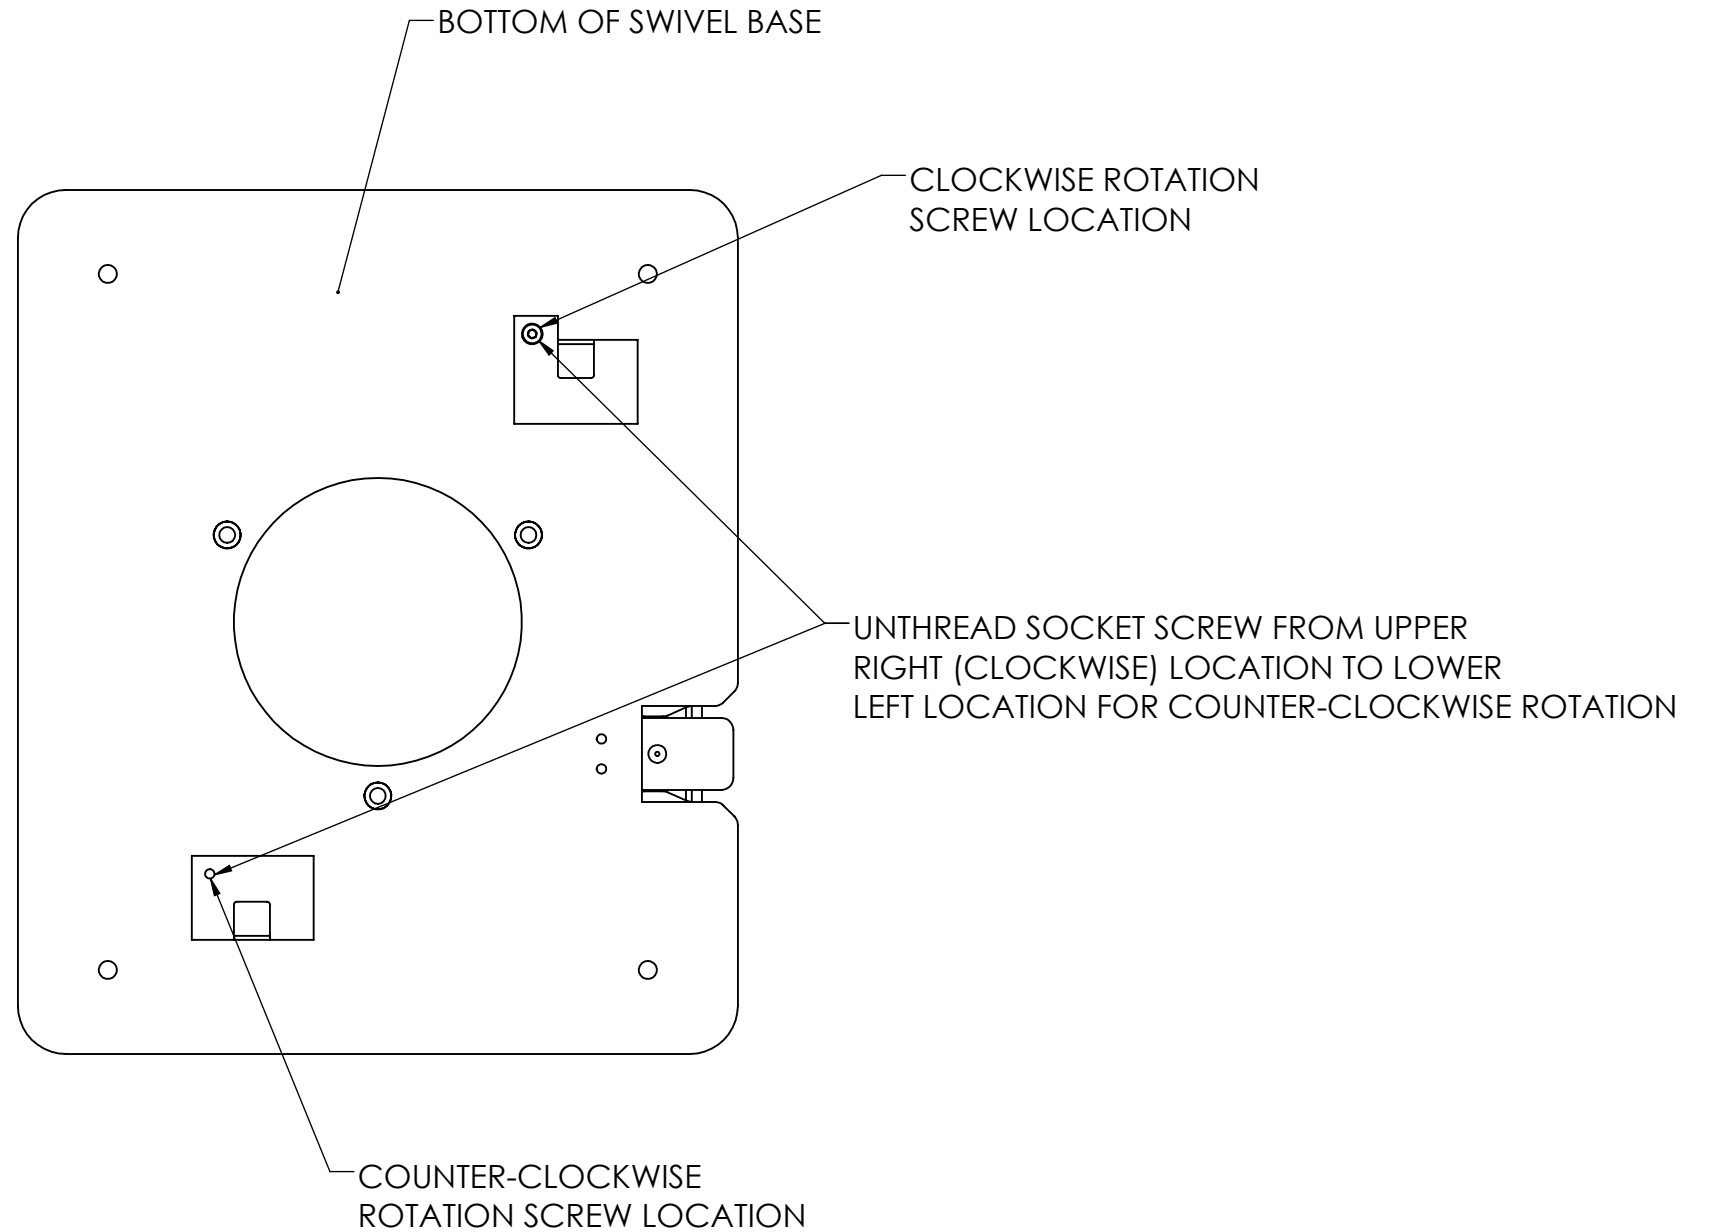


TOOLS LIST:

1. 2MM HEX WRENCH OR BIT WITH DRIVER
2. 3MM HEX WRENCH OR BIT WITH DRIVER
3. #1PHILLIPS SCREW DRIVER
4. #2 PHILLIPS SCREW DRIVER

INSTALLATION INSTRUCTIONS (SHEET 1)

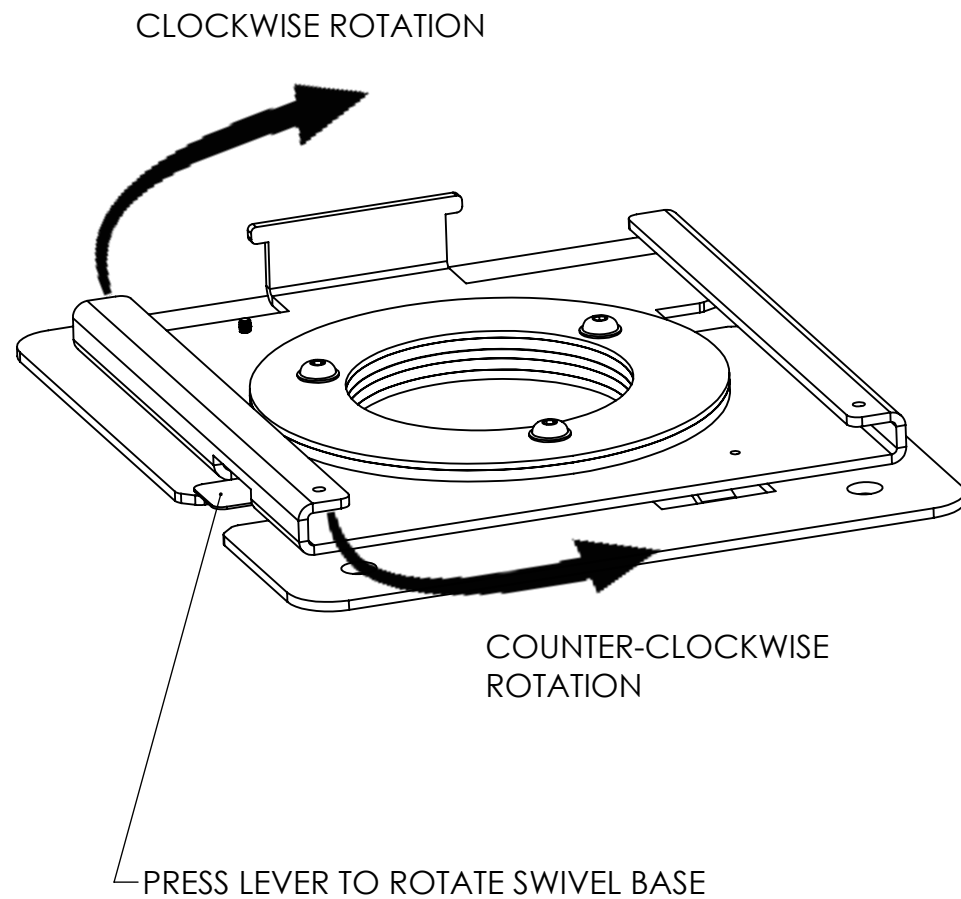

SWIVEL BASE IS ASSEMBLED WITH CLOCKWISE ROTATION FROM THE FACTORY. TO CHANGE FROM CLOCKWISE TO COUNTER-CLOCKWISE, REMOVE ROTATE STOP SCREW AND RE-INSTALL TO COUNTER-CLOCKWISE LOCATION ON BOTTOM OF SWIVEL BASE.


| | | | |
|-------------------------------|--------------------------|--|---|
| DWG. NO. SC-1000-CS | REV. C | TITLE SELF CHECK-OUT, COUNTER TOP, SWIVEL BASE |  |
| DRAWN S. YANG | DATE 3/27/2023 | | SHEET 1 OF 3 |

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS, INC. AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS, INC. IS PROHIBITED.




CUSTOMER INSTRUCTIONS

8 7 6 5 4 3 2 1

INSTALLATION INSTRUCTIONS (SHEET 2)

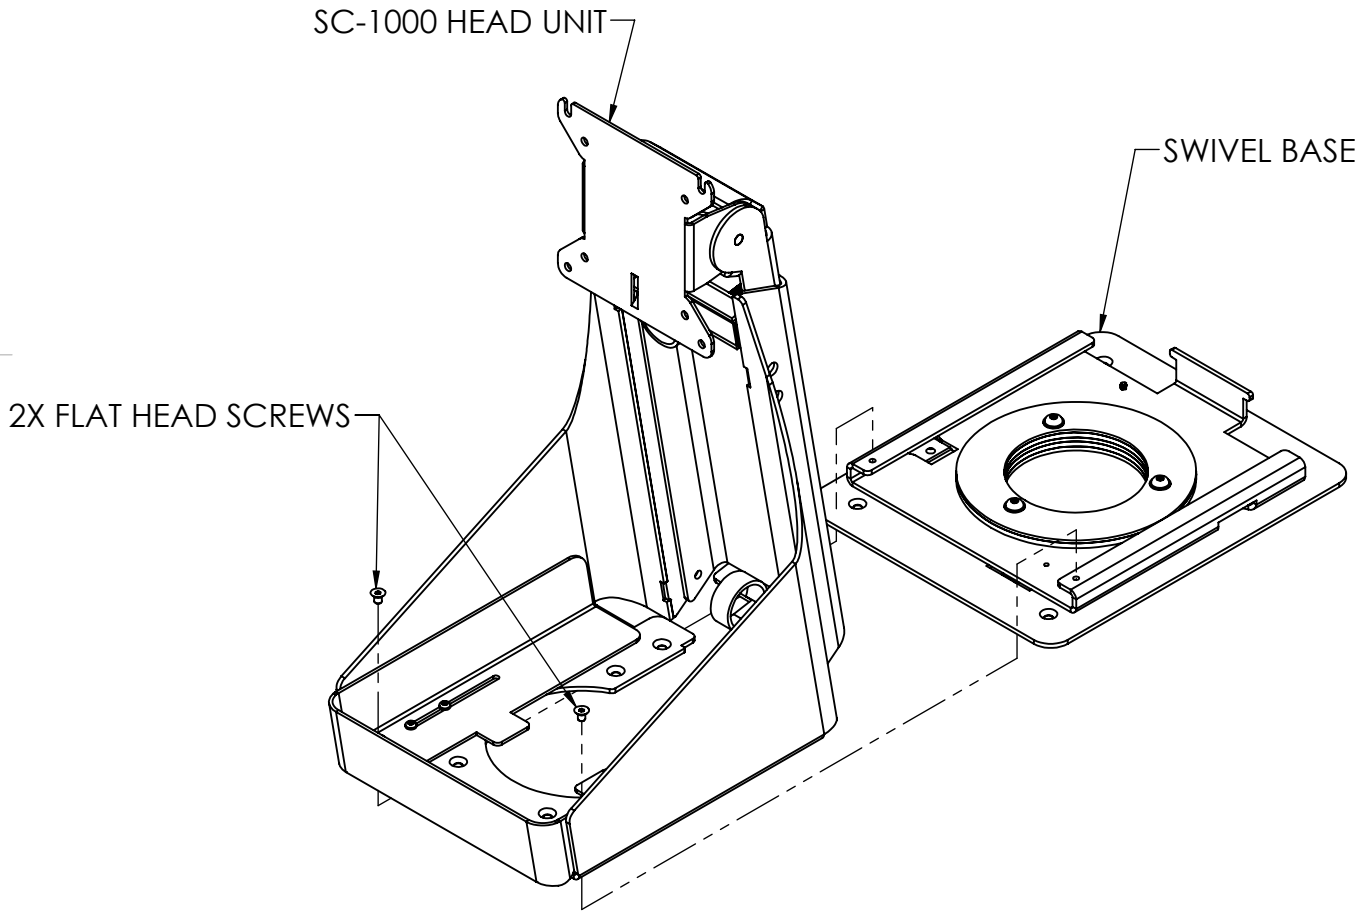

- ASSEMBLY STEPS:
1. ENSURE SWIVEL BASE ROTATES IN DESIRED DIRECTION. SEE SHEET 1.
 2. ATTACH SWIVEL BASE TO COUNTER WITH 4X FLAT HEAD SCREWS (CUSTOMER TO PROVIDE) USING HOLES SHOWN IN DETAIL A.
 3. SLIDE SC-1000 HEAD UNIT ONTO SWIVEL BASE AND SECURE WITH 2X FLAT HEAD SCREWS. SEE DETAIL B AND DETAIL C VIEWS.

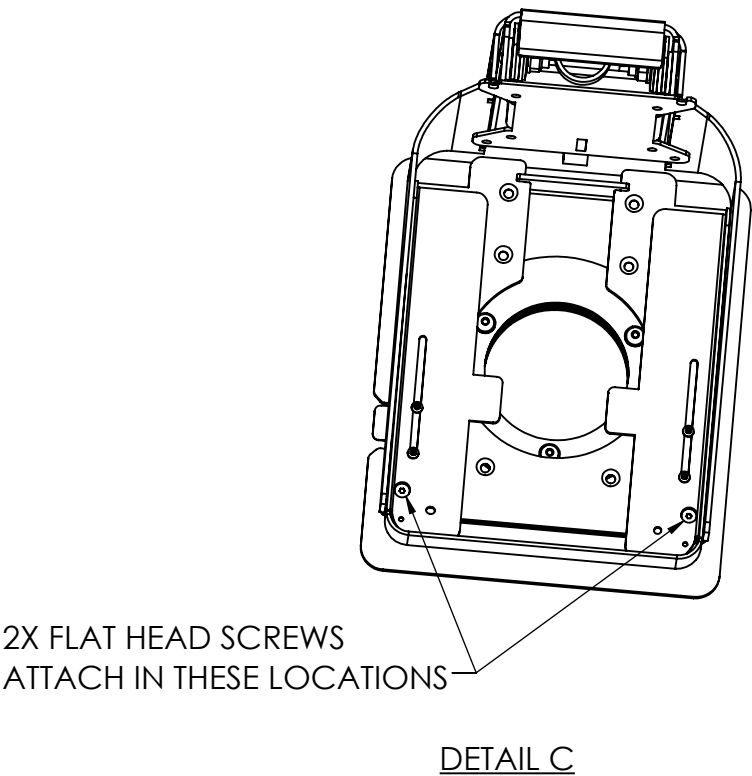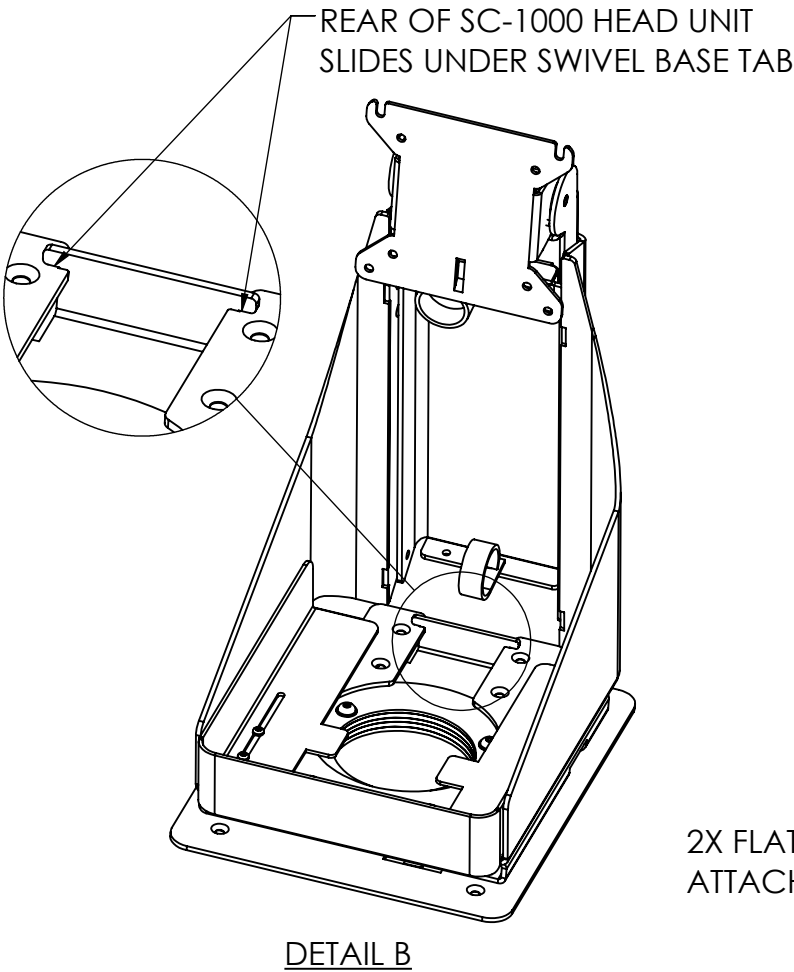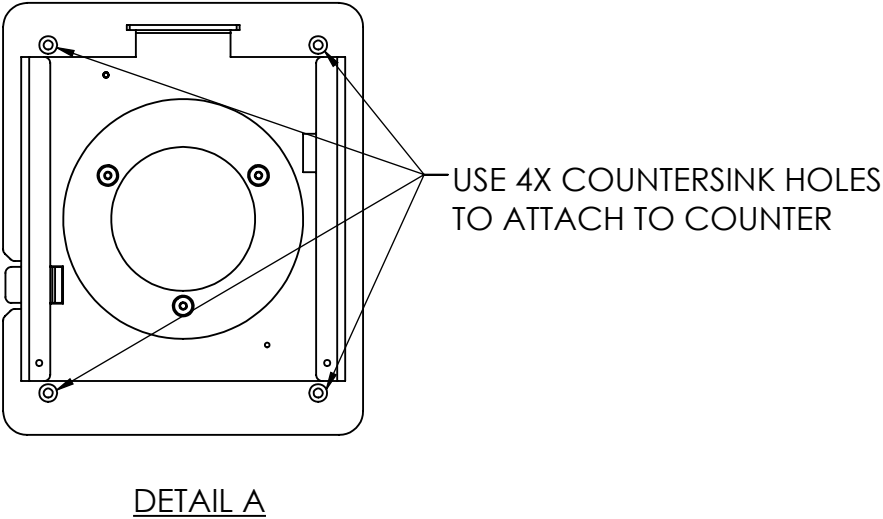

| | | | |
|---|-------------------|---|--------------|
| DWG. NO. SC-1000-CS | REV. C | TITLE SELF CHECK-OUT, COUNTER TOP, SWIVEL BASE | HAVIS |
| DRAWN S. YANG | DATE 3/27/2023 | | SHEET 2 OF 3 |
| THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS, INC. AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS, INC. IS PROHIBITED. | | | |



8 7 6 5 4 3

CUSTOMER INSTRUCTIONS

2 1

INSTALLATION INSTRUCTIONS

(SHEET 3)

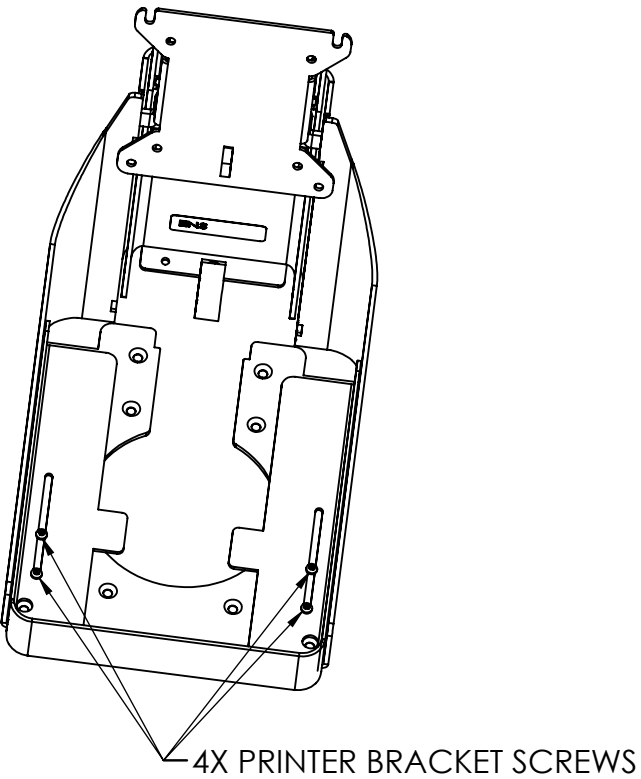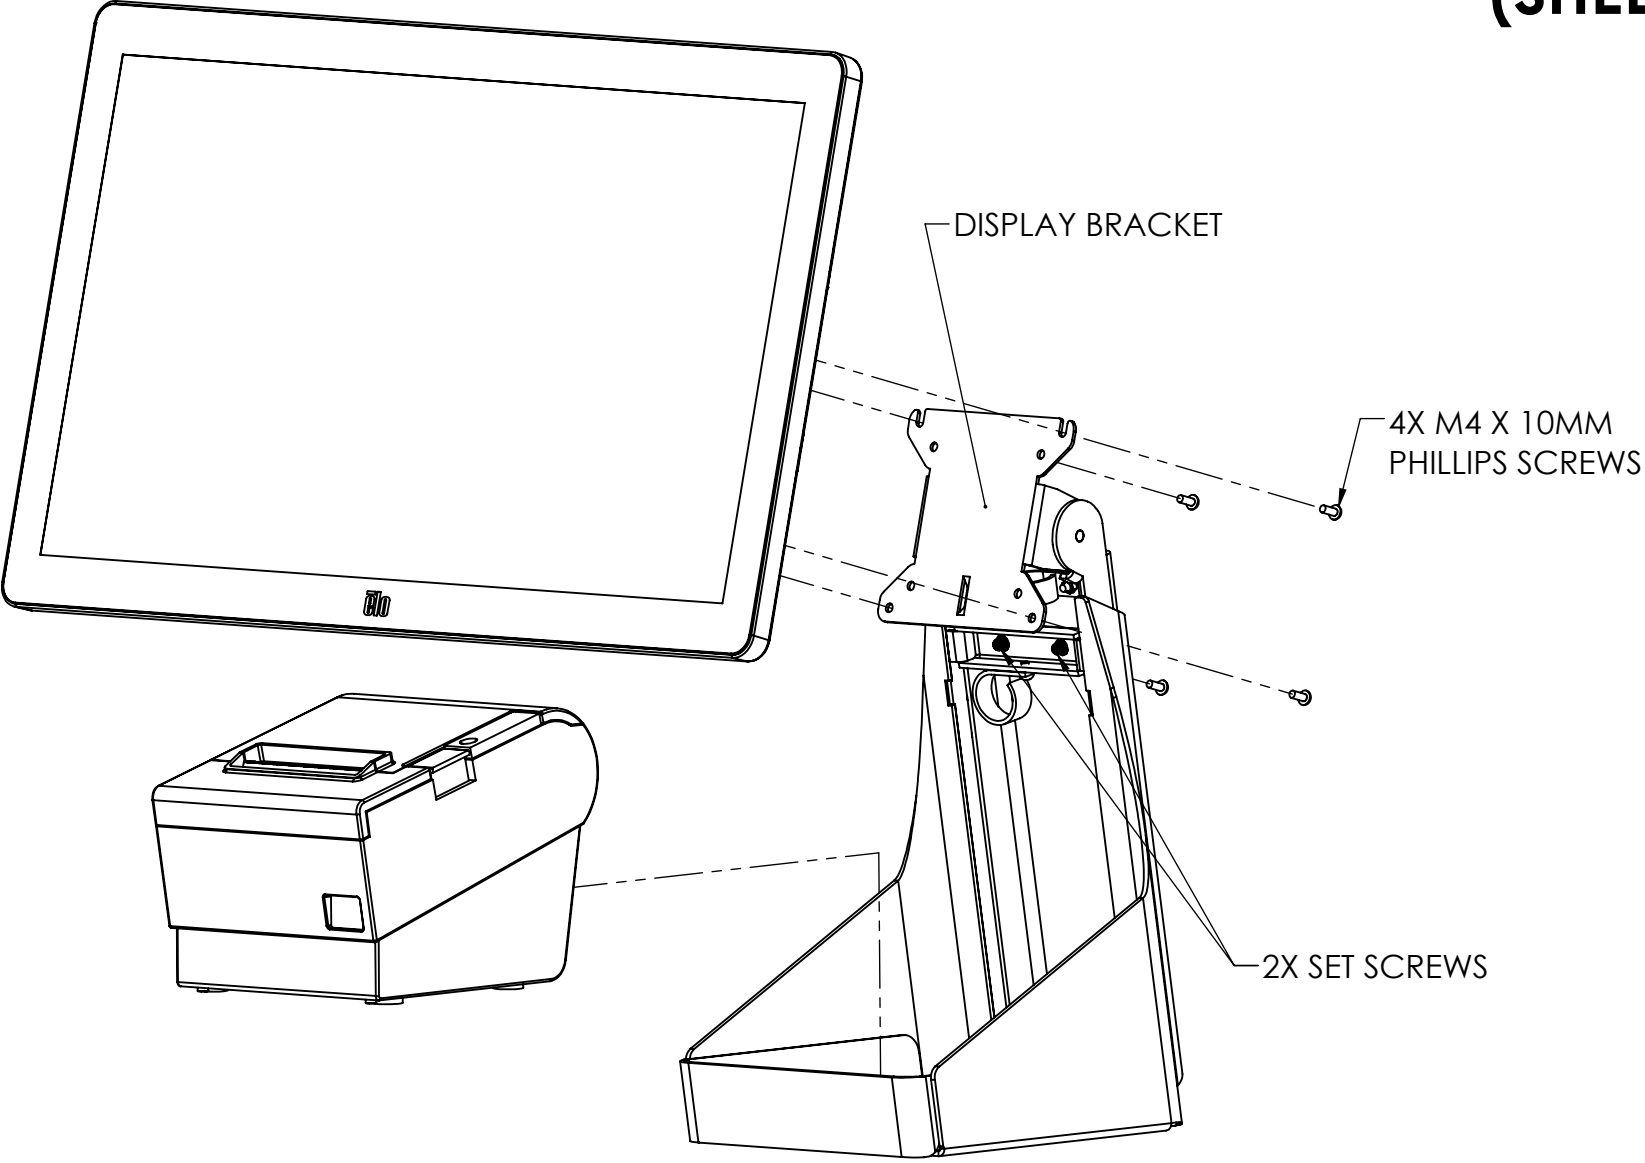

- ASSEMBLY STEPS:
4. LOOSEN 2X SET SCREWS.
 5. HOLD DISPLAY ATTACHMENT BRACKET AT DESIRED HEIGHT.
 6. TIGHTEN 2X SET SCREWS.
 7. ATTACH DISPLAY WITH 4X M4 X 10MM LONG PHILLIPS SCREWS.
 8. SLIDE PRINTER BRACKET TO DESIRED LOCATION.
 9. PLACE PRINTER INTO SC-1000-CF UNIT. 4X SCREWS CAN BE LOOSENED TO ADJUST PRINTER BRACKET (SEE DETAIL A).
(**OPTIONAL**) DUAL LOCK (2 STRIPS INCLUDED) CAN BE USED UNDER THE PRINTER TO HOLD IT IN PLACE IF DESIRED.

| | | | |
|------------------------|-------------------|-----------|---|
| DWG. NO. SC-1000-CS | | REV. C | TITLE SELF CHECK-OUT, COUNTER TOP, SWIVEL BASE |
| DRAWN S. YANG | DATE 3/27/2023 | | |

HAVIS

SHEET 3 OF 3

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF HAVIS, INC. AND REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF HAVIS, INC. IS PROHIBITED.

CUSTOMER INSTRUCTIONS