


D  
C  
B  
A

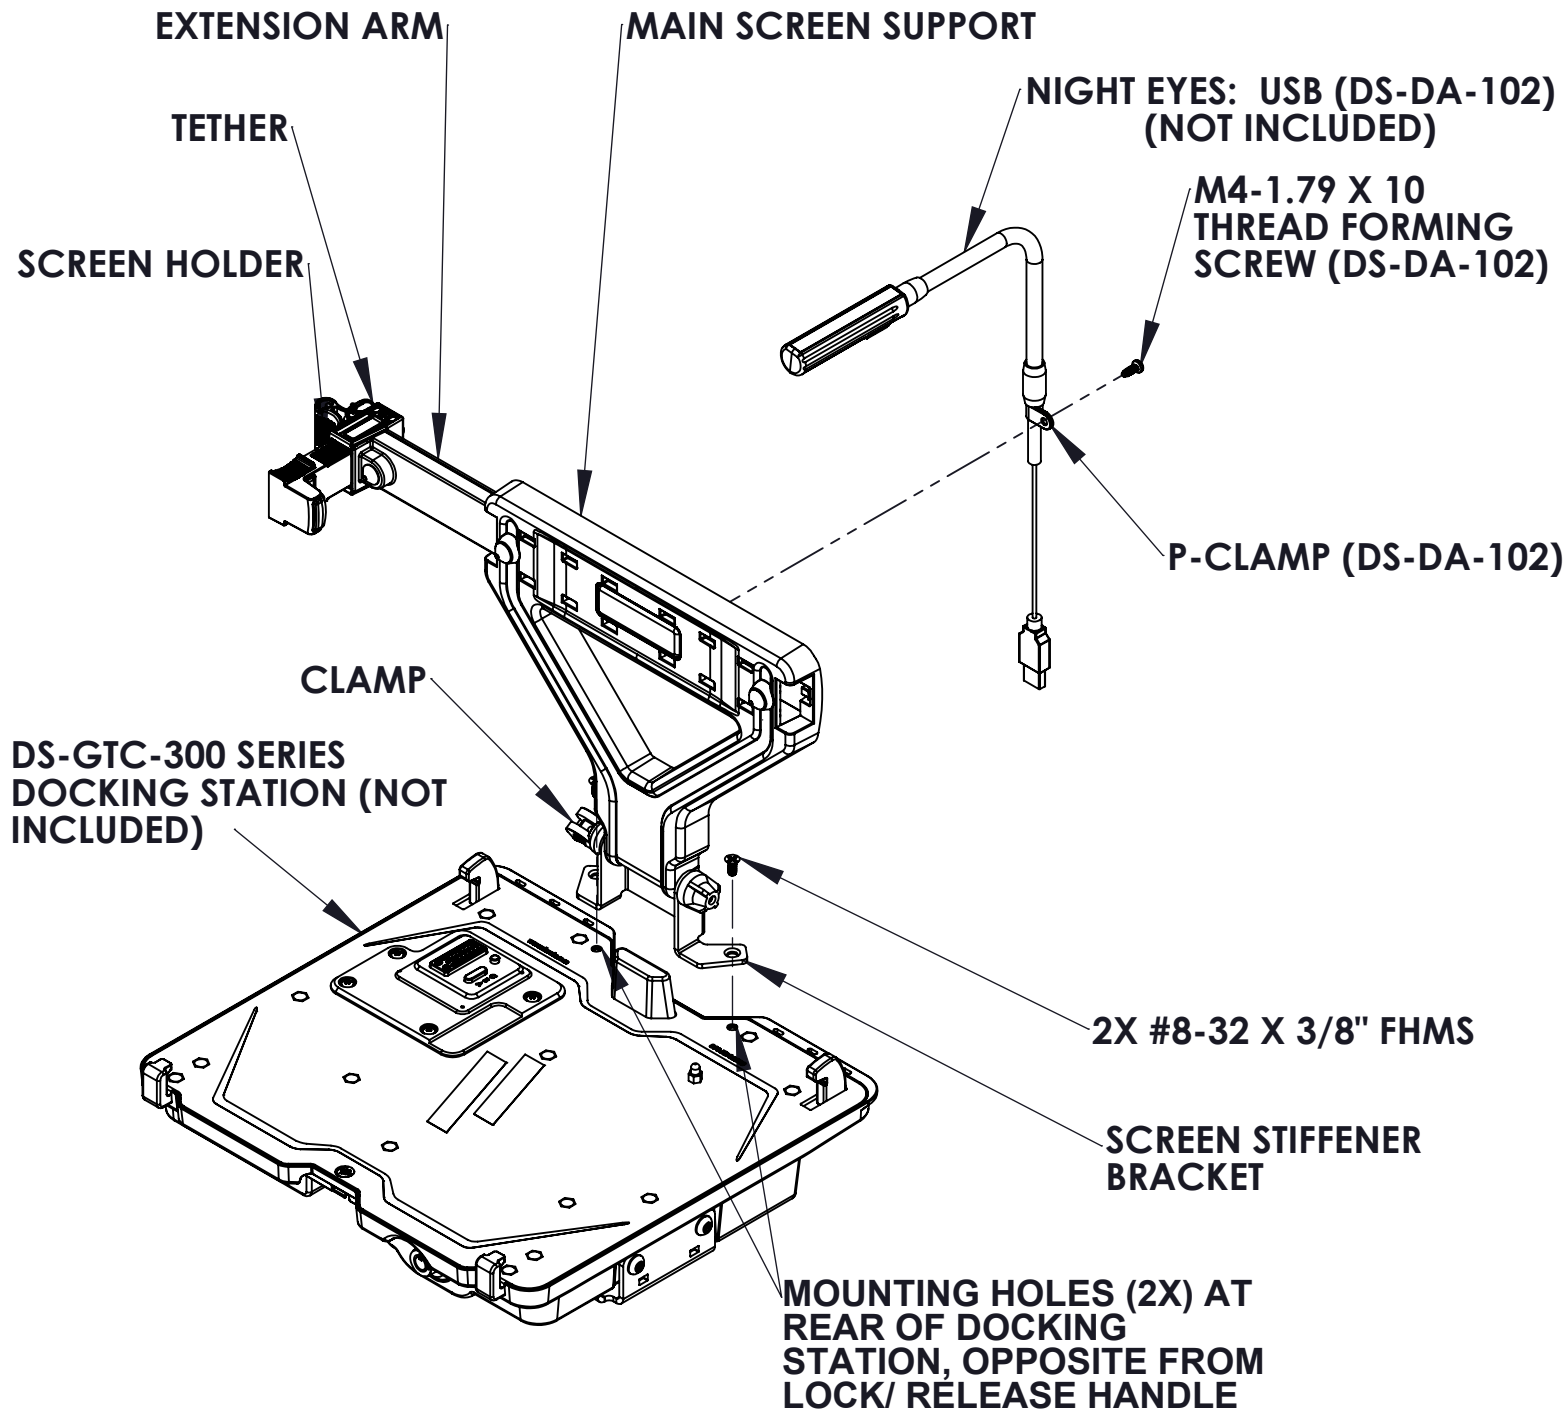

## INSTALLATION INSTRUCTIONS:

**NOTE:** Docking station depicted may not match identically to product purchased. However, all installation instructions are still applicable unless otherwise noted.

1. TO INSTALL SCREEN STIFFENER, POSITION BRACKET OF THE SCREEN STIFFENER SO MOUNTING HOLES LINE UP WITH THREADED INSERTS AT REAR OF DOCKING STATION.
2. INSTALL 2X #8-32 X 3/8" FHMS THROUGH BRACKET AND INTO DOCK. TORQUE FASTENER TO 20 IN-LBS  $\pm 10\%$ .

**NOTE:** When a pre-applied thread-locking patch is not present on hardware, it is recommended to apply a drop of medium strength (blue) thread locking adhesive to the threads of the hardware prior to assembly.

3. DOCK COMPUTER IN DOCKING STATION.
4. EXTEND EXTENSION ARM OUT ALLTHE WAY TO END OF TRAVEL.
5. EXTEND SCREEN HOLDER OUT TO LIMIT OF ITS TRAVEL WITHOUT IT COMING OUT OF EXTENSION ARM.
6. OPEN SCREEN OF COMPUTER TO DESIRED ANGLE. LOOSEN CLAMP AND BRING MAIN SCREEN SUPPORT UP TO BACK OF SCREEN AND TIGHTEN CLAMP.
7. SLIDE EXTENSION ARM IN SO THAT SCREEN HOLDER TOUCHES SIDE OF SCREEN.
8. ADJUST SCREEN HOLDER IN SO IT FITS TIGHT AGAINST SCREEN.

**NOTE:**  
- SCREEN HOLDER IS DESIGNED TO DETACH AND BE HELD BY TETHER WHEN SCREEN IS CLOSED.

- CLAMP CAN BE TIGHTENED BY LOOSENING LEVER ARM, ROTATING NUT AND THEN RETIGHTENING LEVER ARM.

- NIGHT EYES:USB (DS-DA-102) CAN BE INSTALLED ONTO MAIN SCREEN STIFFENER SUPPORT USING P-CLAMP AND SCREW PROVIDED IN NIGHT EYES HARDWARE KIT. PLACE P-CLAMP AROUND NIGHT EYES, AS SHOWN. ALIGN WITH HOLE ON BACK OF MAIN SCREEN SUPPORT AND INSTALL SCREW. TIGHTEN TO 10 IN-LBS.  $\pm 10\%$ .

### HARDWARE KIT CONTENTS

ITEM #	DESCRIPTION	QTY.	FINISH	DRIVE STYLE/SIZE
1	SCREW, FLAT HEAD, #8-32 X 3/8" LONG	2	WITH PATCH	#2 PHILLIPS

**DRAWING NUMBER:**  
**DS-DA-413\_INST\_10-14**

**WARNING:** ALL HAVIS INC. PRODUCTS ARE DESIGNED WITH SAFETY OF USE AND INSTALLATION IN MIND. HOWEVER, IT IS THE SOLE RESPONSIBILITY OF THE OWNER/OPERATOR OF A VEHICLE USING HAVIS INC. MOUNTING AND DOCKING EQUIPMENT, TO INSURE THAT THE EQUIPMENT IS INSTALLED SO THAT IT WILL NOT INTERFERE WITH VEHICLE OPERATION, INTERFERE WITH SAFETY DEVICES, OBSTRUCT VIEW OF DRIVING CONDITIONS, OR IN ANY WAY DEGRADE OCCUPANT SAFETY. IMPROPER INSTALLATION CAN CAUSE SERIOUS INJURY IN THE EVENT OF AN ACCIDENT. INSTALLATION SHOULD ONLY BE PERFORMED BY QUALIFIED PROFESSIONALS. COMPUTERS AND MOTION DEVICES MUST BE MOVED TO AND STOWED/SECURED IN THEIR SAFE DRIVING POSITIONS BEFORE OPERATING VEHICLE.

### PRODUCT DESCRIPTION

**THIS PRODUCT SUPPLIES SUPPORT FOR THE SCREEN OF THE COMPUTER WHEN DOCKED.**

PRODUCT I.D. **DS-DA-413** DATE **10-03-14**

PRODUCT NAME  
**SCREEN STIFFENER DS-GTC-300 SERIES**

**HAVIS**  
1-800-524-9900  
WWW.HAVIS.COM

WEIGHT: (GMS)  
REV. DATE